

Switchgears





Switchgears

Safe switchgear, wired ready for connection



With residual current circuit breaker – the system switches off immediately at a rated residual current greater than 30 mA




Protection class: IP55



Wired ready for connection



Equipped with all necessary protection and safety equipment

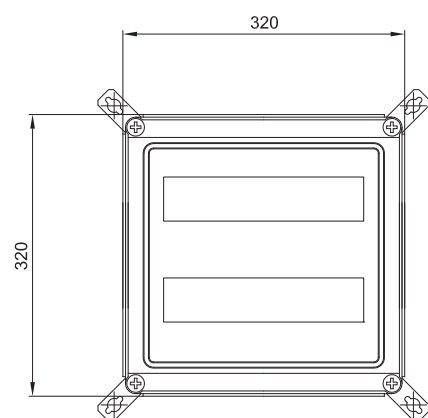

TECHNICAL DATA

Product	Switch-gear EL 100 W	Switch-gear EL 101 W	Switch-gear EL 110 W	Switch-gear EL 111 W
Dimensions (L × W × H) [mm]	320 × 320 × 200	320 × 320 × 200	320 × 320 × 200	320 × 320 × 200
Protection class	IP55	IP55	IP55	IP55
Input voltage [V/Hz]	1 × 230/50	1 × 230/50	1 × 230/50	1 × 230/50
Residual current circuit breakers [A]	25/0.03	25/0.03	25/0.03	25/0.03
Timer, number of channels [Unit]	2	2	2	2
Output voltage of pumps [V]	1 × 230	1 × 230	1 × 230	1 × 230
Output power of pumps [kW]	1 × 0.55	1 × 0.55	1 × 0.55	1 × 0.55
Type of motor startup	Direct	Direct	Direct	Direct
Lighting output voltage [V A]	None	None	1 × 230	1 × 230
Lighting output power [kW]	None	None	1 × 0.30	1 × 0.30
Water level control	None	1	None	1
Output voltage of water level regulator	None	24 V DC	None	24 V DC
Output power of water level regulator [W]	None	1 × 15	None	1 × 15
Number of H-O-A switches [Unit]	1	2	2	3
Number of indicator lights [Unit]	1	2	2	3
Weight [kg]	4.75	5.52	4.87	5.55
Item no.	51341	51342	51343	51344

Custom switchgears

Safe switchgear, wired ready for connection

POWER & PROGRAMMING

Switchgears
Custom
switchgears

Voltage
220–240 V/110–
120 V

Frequency
50 Hz/60 Hz

⊕ Equipped with all necessary protection and safety equipment

⊕ Wired ready for connection

⊕ Protection class: IP55


⊕ On request, for example, with special startup procedures, such as star-delta or soft start, to ensure safe starting of the motors



⊕ With residual current circuit breaker – the system switches off immediately at a rated residual current greater than 30 mA

⊕ A wide range of additional equipment is possible, individually adapted to specific requirements

⊕ Integration of WECS® III controllers, nodes etc. as required

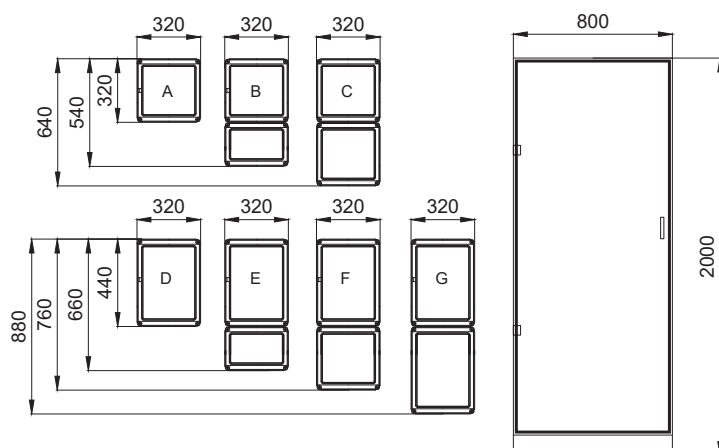

Item no. 58918