

Fire effects





FountainFlame

Create a spectacle with fire, water and light



⊕ Max. fountain height with flame up to 8 m

⊕ "Running" flame can also be projected onto the water parabola

⊕ Enormous creative freedom with the combination of water, fire and light effects

⊕ Suitable for use in fresh water and pool water

⊕ Highly dynamic special effects: Gas flames crown variable water jets, which can be individually illuminated by RGB LED spotlights

⊕ ProNect waterproof connectors for DMX and lighting

⊕ DMX/RDM-enabled system with 230 V technology

ACCESSORIES

Product		Item no.
WECS® III 512/DMX/02	> Page 282	84966
WECS® III 1024/DMX/02	> Page 282	84967
WECS® III Multimedia Controller D2	> Page 286	87750



See the FountainFlame in action:



**EFFECT DESIGN**

Fire effects
FountainFlame 

Fountain height
8 m

Suitable for
Fresh water and
pool water 





Voltage
220–240 V

Frequency
50 Hz/60 Hz

Control system
DMX/RDM

**TECHNICAL DATA**

Product	FountainFlame/DMX/02	
Dimensions (L × W × H)	[mm]	540 × 630 × 980
Number of DMX channels	[Unit]	8
Max. effect height	[m]	8.00
Connection type, gas pressure line		G ½ female thread (EN ISO 228-1), flat sealing
Gas line requirements		Propane (further information on request)
Power consumption max.	[W]	900
Rated voltage		230 V/50 Hz
Rated current	[A]	3.9
Pump power cable length	[m]	10.00
Power connection type		Cable ends, PowerBox 24 V DC/01
DMX/RDM connection type		DMX-Box / 01
Protection class		IP68
Material		Stainless steel 1.4301 (AISI 304)
Weight	[kg]	120.00
Included in delivery		> 1 × 46421 Varionaut 400/DMX/02 > 1 × 0523 Comet Prec 20 - 20 silver > 3 × 36088 ProfiLux LED L RGB Spot/DMX/02 > 1 × 70468 Underwater LED Driver Compact/DMX/02 > 1 × 84956 Underwater Switch 24 V DC Compact/DMX/02 > 1 × Flame system
Item no.		52126



**More about
the product!**

BigFlameAqua

Fireballs with long-range effect



Spectacular fire effect for outdoor use



Large, widely visible fireballs
up to 10 m high



Installation in the
water basin



Operates with
100% propane gas



High operational reliability
thanks to state-of-the-art
burner technology and control
systems



Discover impressive video
sequences here:





EFFECT DESIGN

Fire effects
BigFlameAqua 

Fountain height
10 m


Suitable for
Fresh water and
pool water 

Voltage
220–240 V

Frequency
50 Hz/60 Hz

Effect design

TECHNICAL DATA

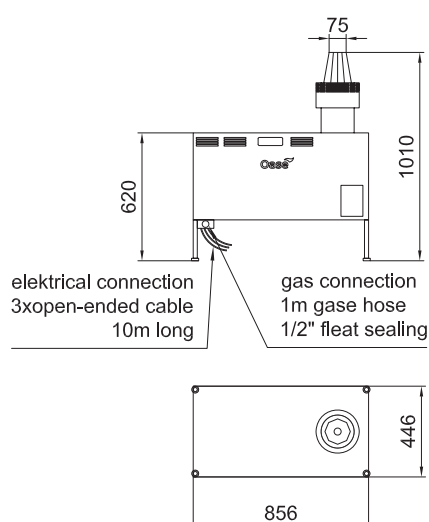

Product	BigFlameAqua
Dimensions (L × W × H) incl. gas tank	[mm] 856 × 446 × 1010
Max. effect height	[m] 10.00
Connection type, gas pressure line	G ½ female thread (EN ISO 228-1), flat sealing
Gas line requirements	Propane (further information on request)
Min. gas operating pressure	[bar] 0.50
Max. gas operating pressure	[bar] 4.50
Safety distance from the device – side	[m] 8.00
Safety distance from the device – above	[m] 17.00
Power consumption max.	[W] 500
Rated current	[A] 2
Power connection type	Cable ends
Rated voltage	230 V/50 Hz
Protection class	IP68
Material	Stainless steel 1.4301 (AISI 304)
Weight	[kg] 70.00
Item no.	52127



**More about
the product!**